

Aluminium New Wave Door **Manufacturing Requirements**


1.	a b	Measure the dia	b mm	corner*
2.		Measure the wi	dth in three places*	mm
3.		a mm	ight in three places*	
*Please Provide aperture si			ox date required:	olerances.
Silicone colour:			Door colour:	
White Caramel 7016 (Grey) Brown Special*		Color		hite Black Gold
		pecial*	Blind Colour: If Applicable	
Is a cill re	equired? Yes	No	Master Door: Viewed Externally	Left Right
Print Name: Date:				
Tillt Name.				
Signature:				

"DOORS THAT DO WHAT BI-FOLDS DON'T!"

Our terms of business can be found online at: http://www.newwavedoors.co.uk/terms-of-business



Aluminium New Wave Door Floor Level Guide

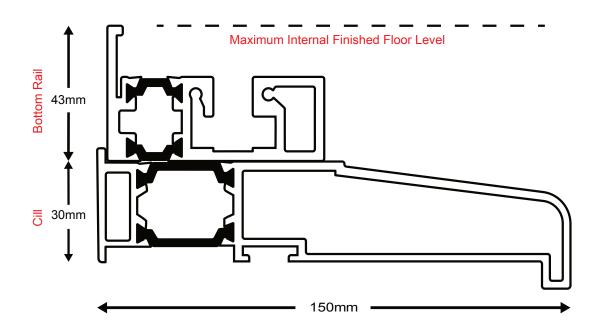

The enclosed Aluminium New Wave Door threshold section (pictured above) is to help you achieve the correct internal floor level and should be used as a template.

The internal finished floor level can be anywhere up to the top of the internal face of the bottom rail, making the internal floor flush with the bottom rail (Maximum Internal Finished Floor Level in picture).

Please check if your door has been ordered with an external cill (see picture). If not then remove the bottom rail from the external cill section and use only the bottom rail section as a template.

The bottom rail, with or without a cill, needs to be level so please ensure the bottom of your aperture is level and the overall aperture is square.