




PVC New Wave Door  
**Manufacturing Requirements**


**1.**



Measure the diagonals from corner to corner

a  mm      b  mm


**2.**



Measure the width in three places

a  mm      b  mm      c  mm

**3.**



Measure the height in three places

a  mm      b  mm      c  mm



Silicone colour:

White     Caramel     7016 (Grey)  
 Brown     Special\*

Is a cill required?     Yes     No

Approx date required:

Door colour:

Handle colour:

Blind colour:   
*(if applicable)*

Master door:  Left     Right  
*(viewed externally)*

Options marked with an asterisk(\*) will incur an extra cost. Please alert us of any changes at the earliest opportunity, additional charges may be incurred if manufacture has already begun.

**Print Name:** .....      **Date:** .....

**Signature:** .....


Our terms of business can be found online at: <http://www.newwavestore.co.uk/terms-of-business>

**“DOORS THAT DO WHAT BI-FOLDS DON'T!”**

T: 01179 074801    E: [info@newwavestore.co.uk](mailto:info@newwavestore.co.uk)  
 18 Clothier Road, Brislington, Bristol, UK, BS4 5PS



## PVC New Wave Door Floor Level Guide

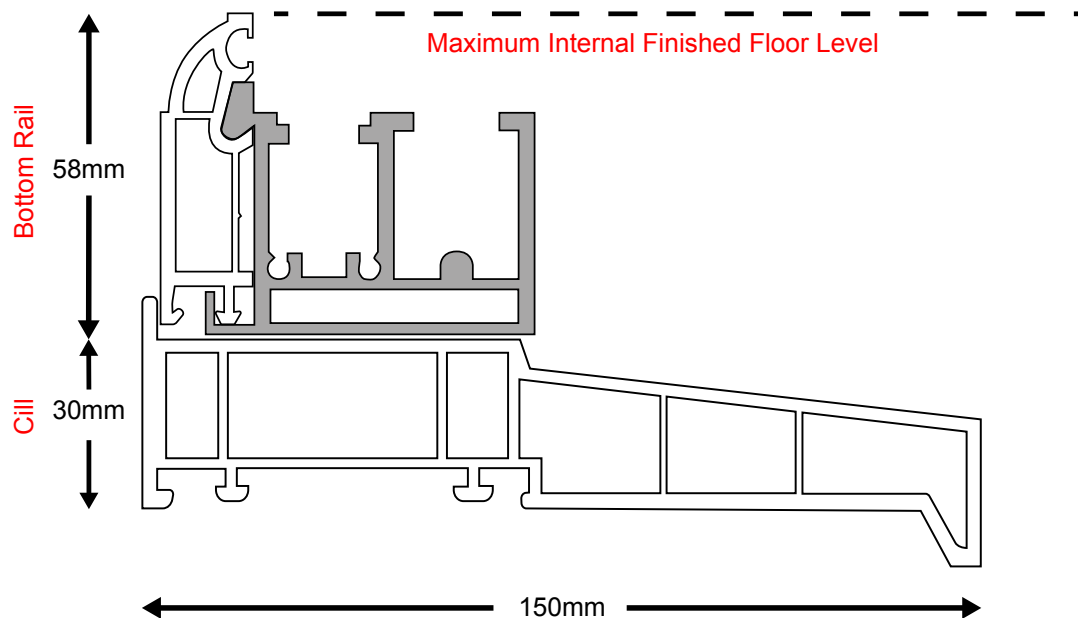

The enclosed PVC New Wave Door threshold section (pictured above) is to help you achieve the correct internal floor level and should be used as a template.

The internal finished floor level can be anywhere up to the top of the internal face of the bottom rail, making the internal floor flush with the bottom rail (Maximum Internal Finished Floor Level in picture).

Please check if your door has been ordered with an external cill (see picture). If not then remove the bottom rail from the external cill section and use only the bottom rail section as a template.

The bottom rail, with or without a cill, needs to be level so please ensure the bottom of your aperture is level and the overall aperture is square.

**“DOORS THAT DO WHAT BI-FOLDS DON’T!”**